

TECH VALVES



双相技术阀门

应用场景:



技术信息



工作压力

PP 材质-高达10 巴
(145.04 psi)在20°C


Acetal和PVDF材质 -高达16巴
(232.06 psi)在20°C



温度

-5 °C - 60 °C
(取决于应用场景)

-20 °C - 90 °C
(取决于应用场景)



型号	M (BSPT)	F (BSPT)	L mm	L1 mm	材质	颜色
23002404042	1/4"	1/4"	51.2	57.6	Acetal	● 黑色
23002504043	1/4"	1/4"	51.7	58.8	PP	● 灰色
23002904041	1/4"	1/4"	51.8	59.0	PVDF	○ 白色

注:所有配置(8毫米倒钩/1/4" 螺纹)可根据需要提供

主要优势:

- 耐高压
- 宽泛工作温度范围
- 高耐酸性
- 缩醛技术阀门通过了WRAS认证
- 可靠、使用寿命长
- 低压压头损失
- 重量轻
- 环境友好、无毒
- 安装快捷、操作方便

四相技术阀门

应用场景:





技术信息



工作压力
高达10巴
(145.04 psi)在20°C



温度
-5 °C - 60 °C
(取决于应用场景)

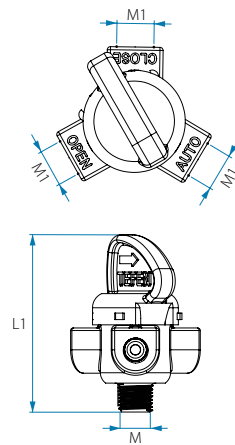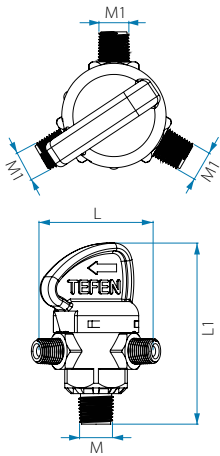


型号	M (BSPT)	M1 (BSPT)	L mm	L1 mm	颜色
23003403033	1/4"	1/8"	49.7	68.3	● 灰色
23003404043	1/4"	1/4"	52.0	68.3	
23003408083	1/4"	8 mm	55.5	68.3	
**23003402483	1/4"	**	51.7	58.8	

型号	M	M1 (NPT) Female	L1 mm	颜色
23003405053	1/4" BSPT	1/8"	68	● 灰色
23003406053	1/4" NPT	1/8"	68	● 黑灰色

注:所有配置(8毫米倒钩/1/4" / 1/8"螺纹)可根据需要提供
** 8mm倒钩连接

主要优势:

- 耐高压
- 宽泛工作温度范围
- 高耐酸性
- 可靠、使用寿命长
- 显著减少磨损和差异
- 具有机动性和操作效率
- 环境友好、无毒
- 安装快捷、操作方便

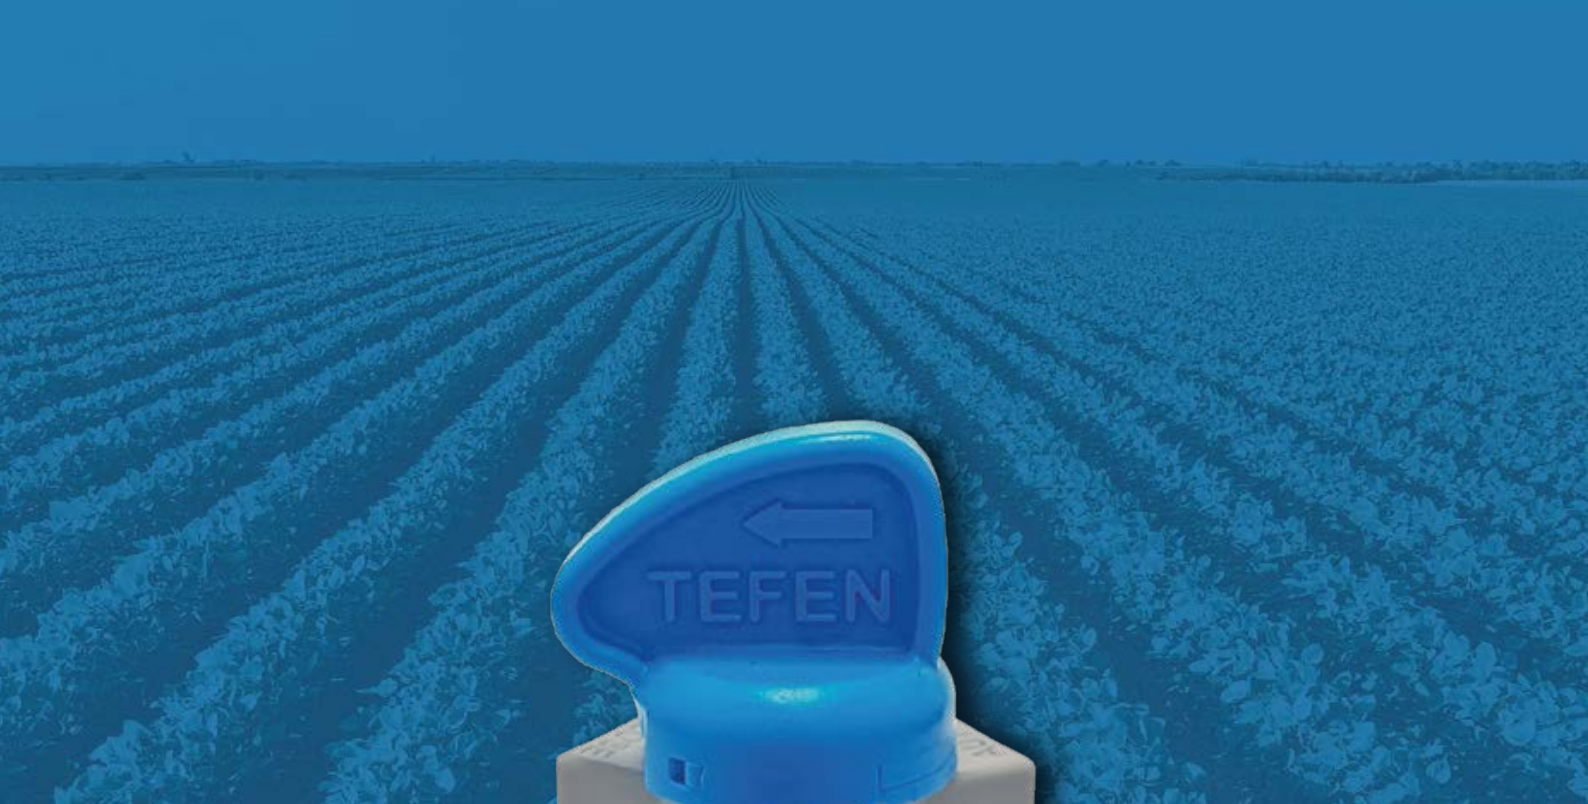

Kibbutz Nahsholim 3081500 Israel | www.tefentech.com
Tel. 972 4 6395944 | Fax. 972 4 6390813 | info@tefentech.com

ISO 9001
2015 certified



For the removal of any doubt, this documents does not constitute an offer on the part of Tefen and/or any undertaking on its part. Tefen may change the content of this document and/or the technical specifications of the products and/or add and/or remove products and/or change prices and/or any terms and conditions specified in this document at any time and upon its sole discretion without any prior notice.