

Tefen Flow Products

Dual Tech Valves

Applications:



Technical Info



Working pressure

PP - up to 10 BAR (145.04 psi)
at 20 °C


Acetal & PVDF - up to 16 BAR (145.04 psi)
at 20 °C



Temperature

(-)5 °C - 60 °C
(subject to application)

(-)20 °C - 90 °C
(subject to application)



Cat. No.	M (BSPT)	F (BSPT)	L mm	L1 mm	Material	Color
23002404042	¼"	¼"	51.2	57.6	Acetal	Black
23002504043	¼"	¼"	51.7	58.8	PP	Grey
23002904041	¼"	¼"	51.8	59.0	PVDF	White

Note: All configurations (8 mm barb/ ¼" thread) available on demand

Main advantages:

- Acetal dual tech valve WRAS certified
- Wide temperature range
- UV resistance
- High acid resistance
- Reliable, long life
- Low pressure head loss
- Light weight
- Non-toxic
- Fast installation & easy operation

Tefen Flow Products

Quatro Tech Valves

Applications:



Agriculture



Industry

Technical Info





Working pressure

Up to 10 BAR (145.04 psi)
at 20 °C



Temperature

(-)5 °C - 60 °C
(subject to application)

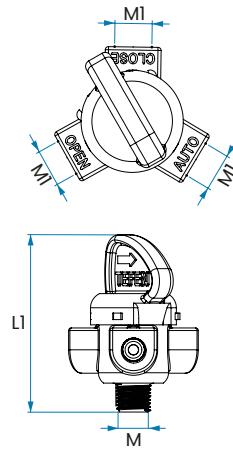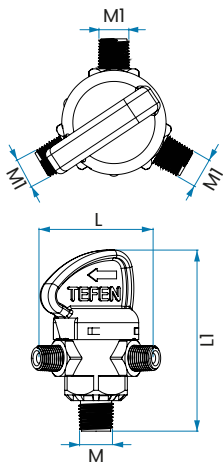

Cat. No	M (BSPT)	M1 (BSPT)	L mm	L1 mm	Color
23003403033	1/4"	1/8"	49.7	68.3	● Grey
23003404043	1/4"	1/4"	52.0	68.3	
23003408083	1/4"	8 mm	55.5	68.3	
**23003402483	1/4"	**	51.7	58.8	

Cat. No.	M	M1 (NPT) Female	L1 mm	Color
23003405053	1/4" BSPT	1/8"	68	● Grey
23003406053	1/4" NPT	1/8"	68	● Dark Grey

Note: All configurations (8 mm barb/ 1/4"/1/8" thread) available on demand

** 8 mm barb connection

Main advantages:

- Wide temperature range
- UV resistance
- High acid resistance
- Reliable, long life
- Erosion resistant
- Provides flexibility and operation efficiency
- Non-toxic
- Fast installation & easy operation