

MixRite Dosing Pumps

10 m³/h

MixRite TF-10

Technical Information

Water pressure	1 - 8 bar (14.7 - 116 PSI)
Flow Rate	0.1 - 10 m3/h (0.44 - 45 GPM)
Working temp	4-40° C (39.2-104° F)
Coupling	1.5" or 50 mm

* Legs available upon request

Available options


Manual ON/OFF	Hydraulic ON/OFF	Electric ON/OFF
		



Application Color Code

Application	Sleeve Color	TEFEN Code	Seal Material	Spring Material
Irrigation		STD	NBR	SST, Hastelloy
Chlorine		CL	Viton	Hastelloy


	L (Hight)	
	On/Off	Air Release
Max.	760 (29.9")	660 (26")
Min.	720 (28.34")	625 (24.6")

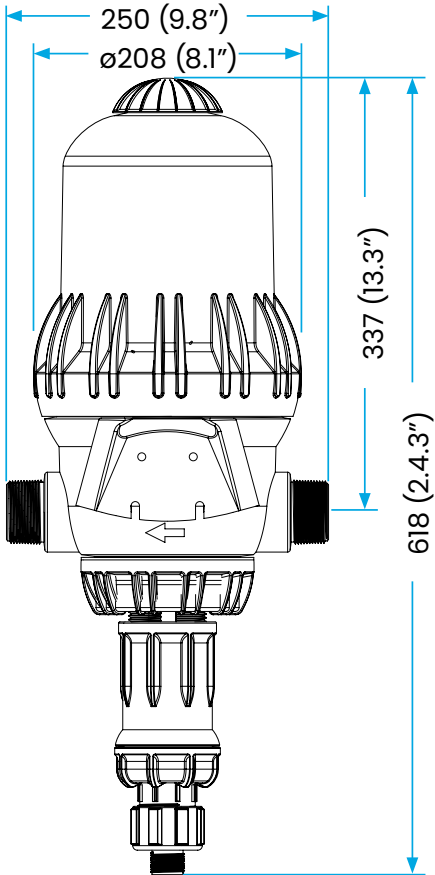

Application Range

Dosage Rate %	Flow Rate Range	Pressure Range	Connectors Dia. Thread	Min-Max Injection w Rate Per Hour	Suction Tube Dia.	Applications	Gross weight std unit
0.1% - 1%	0.1 - 10 m³/h	1 - 8 bar	1 1/2" BSPT	0.1 - 100 l/h	19 mm	Irrigation / Chlorine / Livestock	7.3 KG
0.2% - 2%	0.1 - 10 m³/h	1 - 8 bar	1 1/2" BSPT	0.2 - 200 l/h	19 mm	Irrigation / Chlorine / Livestock	7.3 KG
1% - 5%	0.1 - 10 m³/h	1 - 8 bar	1 1/2" BSPT	1 - 500 l/h	19 mm	Irrigation / Chlorine / Livestock	7.3 KG

Pressure Loss

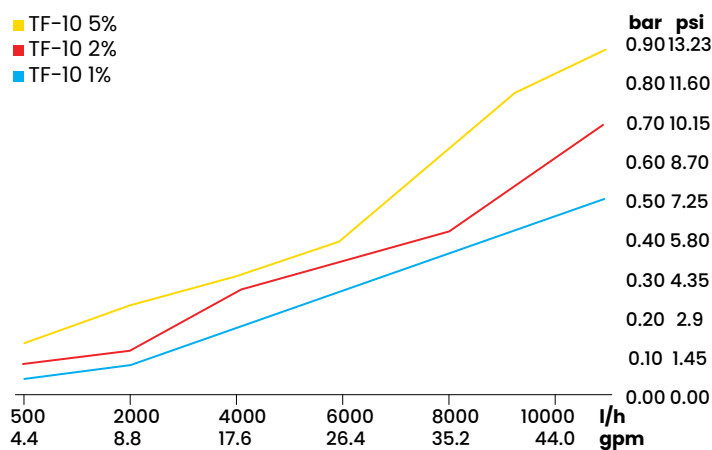

Max. injection rate/h

